

RGB Series




LED Modules for all signage applications


Protection Class.....IP68
Operating Temperature.....-22° ~ 158° F
Life Rating.....>50,000 hours
Fastening.....3M tape & Mechanical

.....Reverse Circuit Protection
.....Wire-Thru Technology

V05 Lens 3-LED

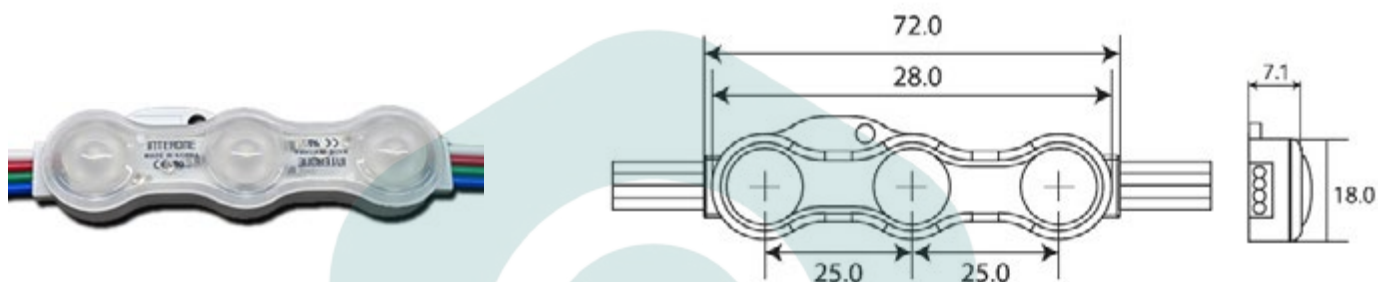

V05 Lens 4-LED

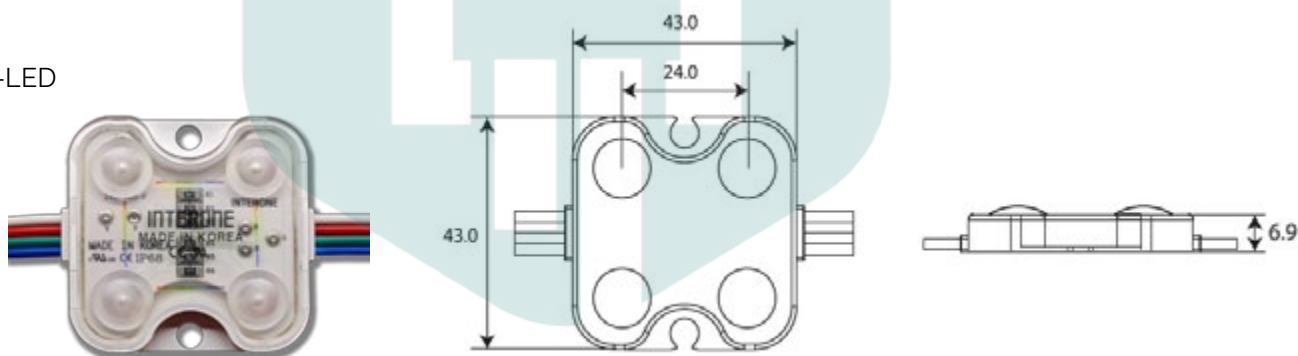

Group	Part Number	LED	Beam Angle	CCT (Kelvin)	Wave-length (nm)	Intensity		Current (mA)	Wattage	Wire length (in)	Module/ft
						Lm/W	Lm				
RGB	Z3V-5F-F-a6-072-K2	3	160°	NA	NA	33	24	60	0.72	3.7	2
	Z4V-5F-F-a6-144-K2	4	160°	NA	NA	28	40	120	1.44	3.9	2