

100WH Series

100W single output
with constant voltage circuit



- Constant voltage design(C.V. mode)
- AC Input voltage 100 - 277V
- Protections:
Overload/Over voltage /Short circuit/
Over temperature
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving
sign applications
- Metal case
- Safety standards : UL879
- EMC standards : FCC Part 15 classB
- 5years warranty

IP68     SELV LPS   


ITEM		IOP100S12WH	IOP100S24WH
INPUT	VOLTAGE RANGE	AC100-277V	
	FREQUENCY RANGE	47-63Hz	
	EFFICIENCY(typ.)	84%	87%
	AC CURRENT(typ.)	1.6A/115VAC (typ) 0.8A/230VAC(typ)	
	INRUSH CURRENT(typ.)	COLD START 60A/230VAC	
	LEAKAGE CURRENT	<1.5mA / 230VAC	
OUTPUT	DC VOLTAGE	12V	24V
	RATED CURRENT	8.33A	4.16A
	RATED POWER	100W	
	RIPPLE&NOISE(max.) Note2	170mVp-p	290mVp-p
	VOLTAGE ADJ. RANGE	±5%	
	VOLTAGE TOLERANCE Note3	±3%	
	LINE REGULATION Note4	±1%	
	LOAD REGULATION Note5	±2%	
	SETUP,RISE TIME(max.)	3000ms,100ms/115VAC 3000ms,100ms/230VAC at full load	
HOLD UP TIME(typ.)	10ms/115VAC 100ms/230VAC at full load		
PROTEC-TION	SHORT CIRCUIT	Hiccup mode ; recovers automatically after fault condition is removed	
	OVERLOAD	Over 110% of rating ; recovers automatically after fault condition is removed	
	OVER VOLTAGE	115-140% of rating	
	OVER TEMPERATURE	100± 10℃(temp. Sensor) ; recovers automatically after fault condition is removed	
ISOLA-TION	WITHSTAND VOLTAGE	I/P-O/P:AC3.75KV, I/P-F.G:AC2KV, O/P-F.G:AC1.5KV	
	ISOLATION RESISTANCE	I/P-O/P, I/P-F.G, O/P-F.G:DC500V 100Mohms(At room temp. & humid.)	
ENVIRON-MENT	WORKING TEMP.&HUMID.	-40-+70℃(Refer to "DERATING CURVE"),20-95%RH	
	STORAGE TEMP.&HUMID.	-40-+75℃,10-95%RH	
	VIBRATION	10-500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	
OTHERS	DIMENSION/WEIGHT	237*56.7*41.3mm(L*W*H) / 0.92Kg	194*56.7*41.3mm(L*W*H)/0.75Kg

NOTE


1. All parameters not specially mentioned are measured at 220Vac input, rated load and 25℃ of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with 0.1 uF & 47uF parallel capacitor.
3. Tolerance : includes set up tolerance, line regulation and load regulation.
4. Line regulation is measured from low line to high line at rated load.
5. Load regulation is measured from low 0% to 100% rated load.

DC24V


■ BLOCK DIAGRAM

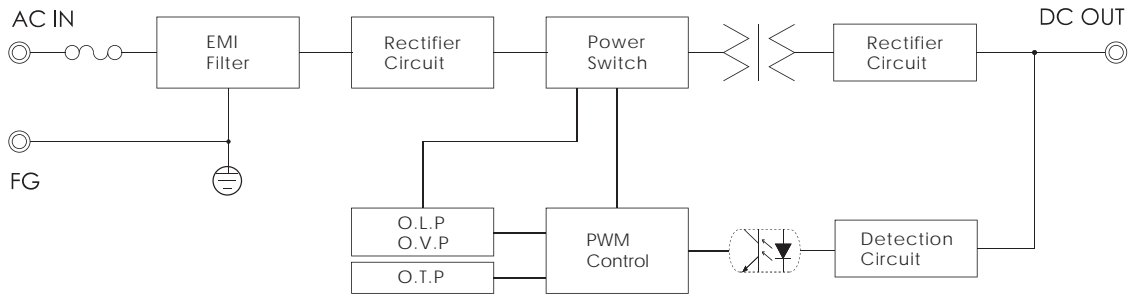

■ DIMENSIONS(unit:mm)

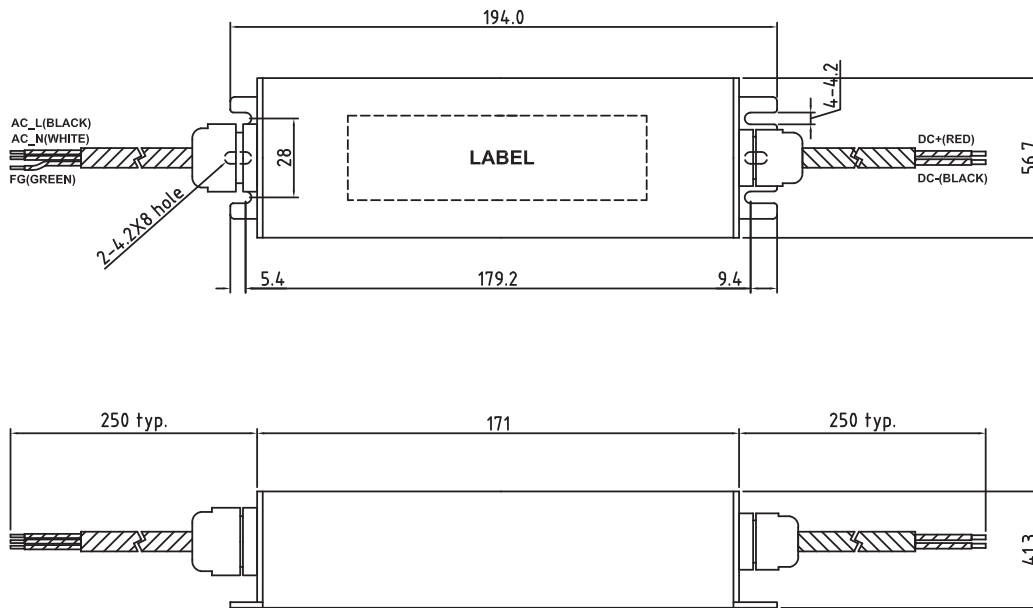

■ DERATING CURVE

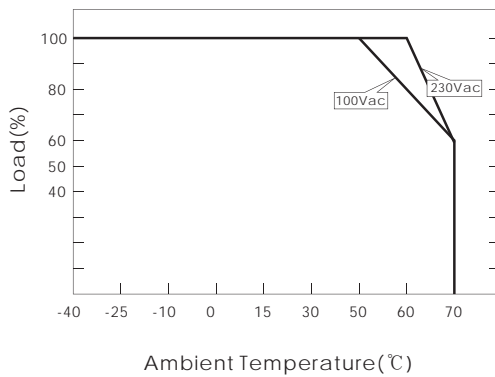

■ STATIC CHARACTERISTICS

