192W - 24V Dual Output Switching Power Supply OMS-EP192W-24V

E528990

Class 2
Made in Korea

Specifications
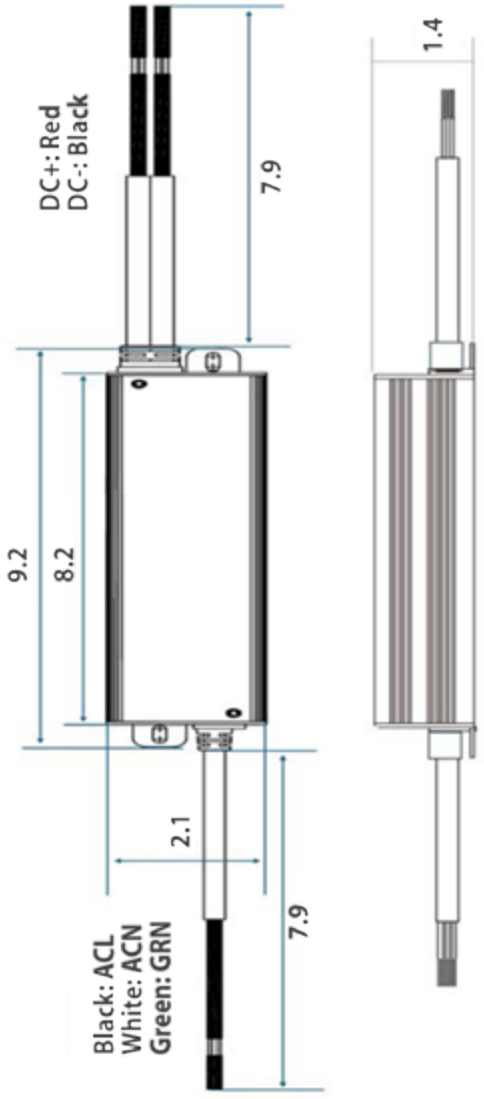
INPUT	VOLTAGE	AC90V - 277V
	AC CURRENT	2.0A
	FREQUENCY	50/60Hz
	INRUSH CURRENT	50A
	INPUT POWER	110W
	EFFICIENTY	≥91%
	POWER FACTOR	≥0.95
OUTPUT	VOLTAGE	24VDC
	RATED CURRENT	8.0A
	LINE & LOAD REGULATION	+/-5%
	RIPPLE & NOISE(MAX)	350mVp-p
	SETUP, RISING TIME	1000ms @220Vac Full Load
	HOLD UP TIME	50ms @220Vac Full Load
PROTECTION	ENCLOSURE PROTECTION	IP68
	CLASS	Class 2
	SHORT CIRCUIT	Auto Restart
	OVER CURRENT	Auto Restart
	OVER TEMPERATURE	Latch mode
ISOLATION	WITH STAND VOLTAGE	I/P-O/P3.75KVac/10mA, I/P-Case 1.5KVac/10mA
	ISOLATION RESISTANCE	100MOhm Max/500Vdc
ENVIRONMENT	WORKING TEMP. & HUMIDITY	-4~122°F, 20~85%RH
	STORAGE TEMP. & HUMIDITY	-4~167°F, 5~95%RH
	DIMENSION (INCH)	9.2 x 2.1 x 1.4
	WEIGHT (LBS)	1.4
	CASE MATERIAL	Aluminum
	MOLDING MATERIAL	Silicon
	CERTIFICATE	UL879 - UL E528990
	QTY/CTN	10