



**Tiny Series**


*LED Modules for all signage applications*

- Protection Class.....IP68
- Operating Temperature.....-22° ~ 158° F
- Life Rating.....>50,000 hours
- Fastening.....3M tape




- .....Reverse Circuit Protection
- .....Wire-Thru Technology

V05 Lens 1-LED



V05 Lens 3-LED

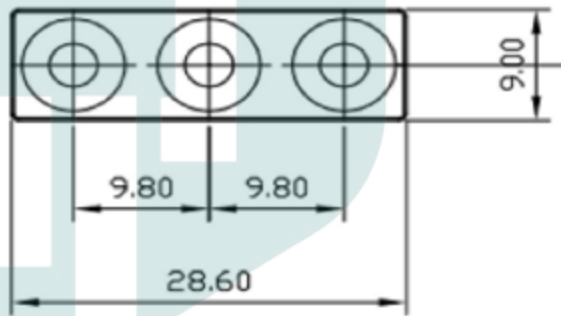

Group	Part Number	Color	Beam Angle	CCT (Kelvin)	Wave-length (nm)	Intensity		Current (mA)	Wattage	Wire length (in)	Module/ft
						Lm/W	Lm				
Tiny Lens 1-LED	Z1V-5T-W6-a6-024-S2	White	160°	6500K	NA	104	25	20	0.24	1.0	8
	Z1V-5T-O3-a6-024-S2	Warm	160°	3000K	NA	80	19	20	0.24	1.0	8
Tiny Lens 3-LED	Z3V-5T-W6-a6-048-S2	White	160	6500K	NA	90	43	40	0.48	1.7	4
	Z3V-5T-O3-a6-048-S2	Warm	160	3000K	NA	83	40	40	0.48	1.7	4
	Z3V-5T-W9-a6-048-S2	White	160	9000K	NA	93	45	40	0.48	1.7	4

