

KLite Prism for all signage applications

- Max brightness with ASGM asymmetrical gradient micrprism lens
- More lumens with less energy
- LED provided by Samsung
- Waterproof enclosure for dry, wet and damp environments
- Variety of options in power, color, lens and size
- Made in Korea by Interone



Not like others:



.....Non-Polarized Wires




.....Reverse Circuit Protection



.....Wire-Thru Technology

Common Specifications:

- Operating Voltage.....12DC/24VDC
- Power Consumption.....1.6W
- Beam Angle.....200°
- Operating Temperature.....-22° ~ 158° F
- Life Rating..... 50,000 hours
- IP RatingIP68
- Fastening.....Double sided tape
- Warranty.....5 Years

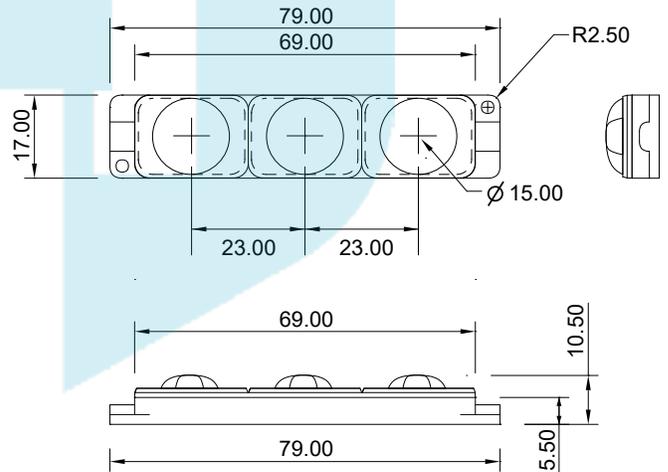

Unit: mm

Size	P/N	Voltage (V)	Watt (W)	Current (mA)	CCT	Lumen	Lm/W	Wire Length	Module/ Ft
3 LED	Z3V-C7-W6-a0-160-12	12	1.60	133	6500	167	104	4.5	2

*Other options (CCT, Wattage) are available by custom order with MOQ 100,000 PCS.